AC PMA

POLE MOUNT FOR A SATELLITE SPEAKER ON A SUBWOOFER

IMPORTANT NOTES - Before connecting and using this product, please read this instruction manual carefully and keep it on hand for future reference. The manual is to be considered an integral part of this product and must accompany it when it changes ownership as a reference for correct installation and use as well as for the safety precautions. RCF S.p.A. will not assume any responsibility for the incorrect installation and / or use of this product. Visit www.rcf.it to know which combinations of speakers and subwoofers are allowed.



SAFETY NOTES

Place the subwoofer only on a flat surface and make sure the locking screw [4] is tightened and the safety pin [5] is inserted. Do NOT loosen the locking screw [4] and remove the safety pin [5] when a satellite loudspeaker (max. weight: 50 kg) is mounted.

USE


- Place the subwoofer [1] stably on a flat surface.
- Insert the lower rod [2] (down to the plastic ring) into the subwoofer flange adapter [3] (not included).
- Remove the locking screw [4] and the safety pin [5] (if previously inserted into a hole of the extension rod [8]).
- Adjust the extension rod [8] height and insert the safety pin [5] into its exposed lowest hole, then let the extension rod go down until it is stopped by the safety pin on the clamp [7].
- Insert the locking screw [4] (through a loop of the safety pin wire [6]) into the clamp [7]. IMPORTANT: do not raise the bar over 1100 mm.
- Securely tighten the locking screw [4].
- Put the satellite loudspeaker on the extension rod [8].

SPECIFICATIONS

Max. load: 50 kg (110.2 lbs)

Material: steel

Net weight: 1.5 kg (3.3 lbs) Dimensions: see the drawing

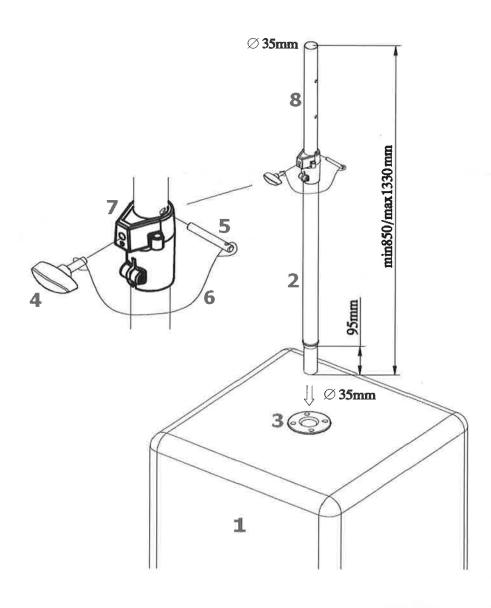



the rules of sound