



A·4

Smart ArtNet to DMX converter



Description

The A-4 is a multi-purpose ArtNet DMX node/recorder/player combined with monitoring features. With the A-4, fixtures become remotely accessible via RDM, allowing you to program, upload, and schedule your show from a remote location, when connected to the Internet. It also works as a remote monitoring device, notifying the technicians of any irregularities within the fixtures. Since all the outputs are assignable, the A-4 can work as a regular ArtNet node, a DMX splitter with configurable outputs, and a RDM setup device.

Features and benefits





- ✓ Smart node with ArtNet, sACN, RDM, and DMX supported protocols
- ✓ Alert and log features in the cloud
- ✓ Built-in RDM recorder and player
- ✓ 4-port ArtNet node and DMX input/output splitter with fully assignable inputs and outputs
- ✓ Live and remote monitoring for all fixtures connected
- ✓ Show recording and play-back, storing of monitoring data from integral SD card
- ✓ Applicable for all luminaires with DMX; monitoring requires RDM
- ✓ Upload and program your show remotely

Certifications & classifications



RoHS



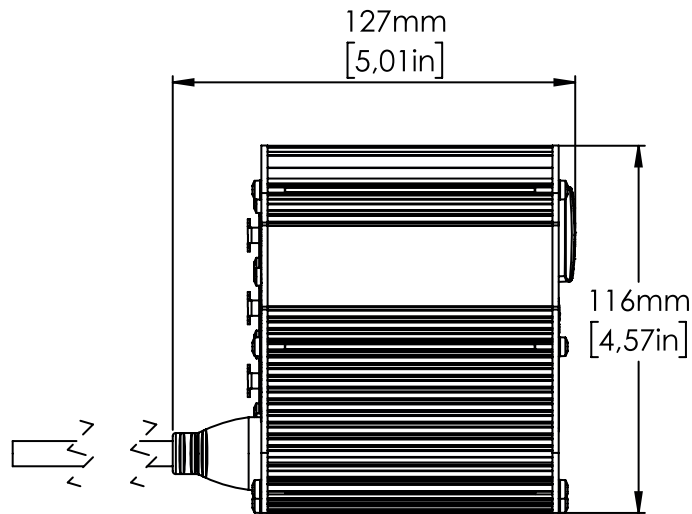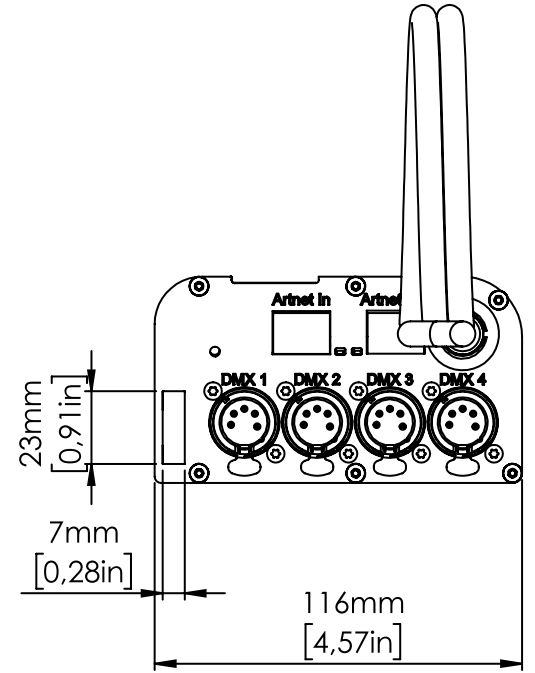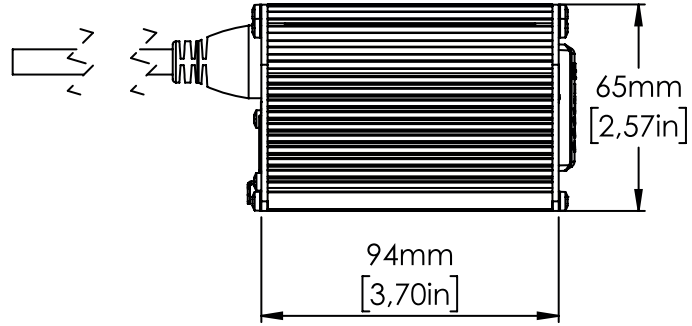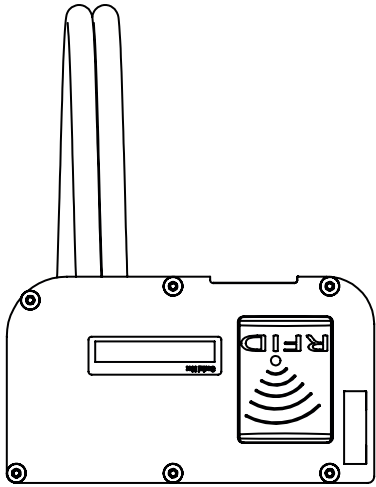

Specification

Physical	Color options	Black - RAL 9004
	IP class	IP20
	Material	Aluminium PC/ASA Plastic Rubber Steel
	Net dimensions	95 x 115 x 65 mm
	Net dimensions inches	3.7 x 4.5 x 2.6 inches
	Net weight	0.7 kg (1.5 lbs)
Electrical	AC power, max.	90 - 264V 50/60Hz
	AC Power, nominal	100 - 240V 50/60Hz
	Max power consumption	10 W
	Standby power consumption	2 W
	Typical power consumption	2 W
Programming and Control	Compatible Operating System	Windows Vista Windows 7 Windows 8 Windows 10
Connections	Art-Net data Input	RJ45 connectors
	DMX data in/out	4 x 5-pin female locking-DMX
	Signal source	Artistic License Art-Net 3 Streaming ACN
Installation	Orientation	Any
	Rigging possibilities	Hanging / horizontal mounted
Thermal	Cooling	Passive
Included items	Included items	User Manual Horizontal M-10 bracket A-4 Touring bracket
Conforms To	CE - 2014/30/EU: EMC Directive	EN 55103-2 EN 61000-3-2 EN 61000-3-3 EN 55024 EN 55032

CE - 2014/35/EU: Low Voltage Directive	EN 62368-1
RoHS2 Directive	2011/65/EU
UL	UL Std. 62368-1

Certified To	CSA	CSA Std. C22.2 No. 62368-1, Ed:2
---------------------	-----	----------------------------------

NOTES:

Due to continuous improvements and innovations, specifications may change without notice.

LEDs' expected lifetime provided by manufacturer and obtained under manufacturer's test conditions.

Zoom range defined as a minimum beam angle to a maximum field angle.

Photometric measurements obtained with Goniometer Scan / SGM Illumination Lab 1.6.0.0.

Lumen output in pixel products is calculated.

Ordering information

Qty	Product name	Item number
<input type="text"/>	A-4 ART-NET to DMX Converter	80070217
<input type="text"/>	<input type="text"/>	<input type="text"/>
	Accessories	Item number
<input type="text"/>	Mounting horizontal bracket for A-4 & ILD	17000099
<input type="text"/>	<input type="text"/>	<input type="text"/>



Headquarter [+45 70 20 74 00](tel:+4570207400)

Mail info@sgmlight.com

Website sgmlight.com