

The RU-2002 is a microphone pre-amplifier with chimes for the PM-660D or PM-1200D paging microphones with a 5-pin DIN socket. The talk switch of the microphone activates an isolated relay output that can be used for remote controls. The RU-2002 provides 4 different chimes.




Article number:RU-2002
Alternative products: RU-2001


Specifications

Power source	12 - 24 V DC or AC Adapter
Current consumption	60 mA
Connectable microphones	1 (DM-1200D, PM-1200D-EB QJ, PM-222D)
Controls	Microphone volume, chime volume
Inputs	-62 dB (1 kHz 0 dB = 1 V/Pa)
Control input	from microphone
Outputs	0 dBV, 600 Ω , balanced
Control output	no-voltage-make-contact, max. 30 VDC, max. 0.5 A
Dimensions (W x H x D)	124 x 42,5 x 159 mm
Dimensions (ϕ x D)	x 159 mm
Finish	black,


Appearance

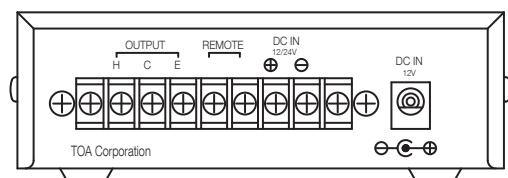


Rear View

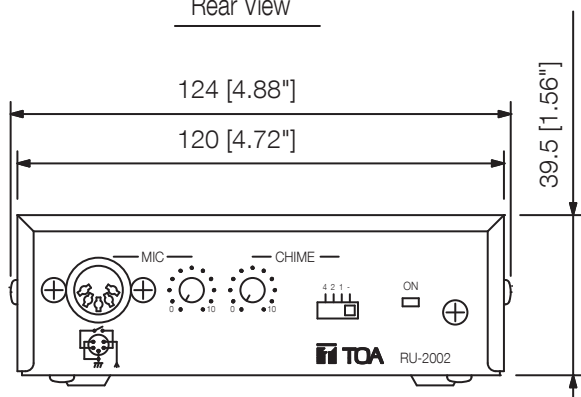

Front View

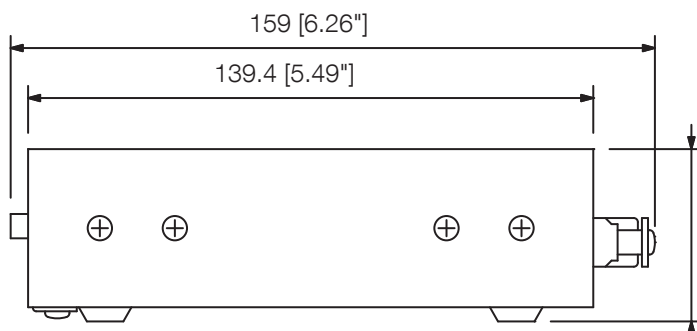

Side View

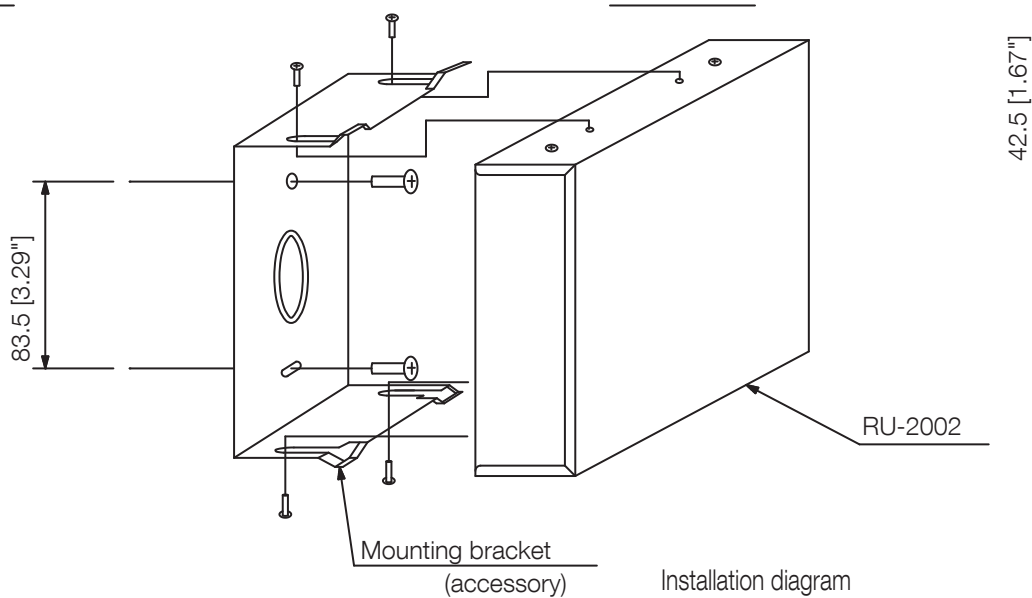

Installation diagram

UNIT:mm

SCALE:1/2