

# F-1522SC

## PANEL CONE SPEAKER

The F-1522SC ceiling and wall-mounted speaker covers an extremely wide area and can be used for 25, 70 and 100 V line applications. Well-balanced sound can be heard uniformly at any location.



Order no: F-1522SC EU


### Specifications

Frequency response	65 Hz - 18 kHz
Sensitivity (1#W, 1#m) (combined)	88 dB
Speaker component	10 cm cone-type
Rated input	6 W
Tappings	6 / 3 W (100 V), 6 / 3 / 1.5 W (70 V)
Mounting hole	135,00 mm
Power handling capacity	Continuous pink noise: 9 W (8 Ω), Continuous program: 18 W (8 Ω)
Dimensions (W x H x D)	x 117
Dimensions (ø x D)	155 x 117 mm
Finish	Steel plate, Fire-resistant ABS resin (resin material grade: UL-94 V-0), white

# F-1522SC

PANEL CONE SPEAKER

## Appearance

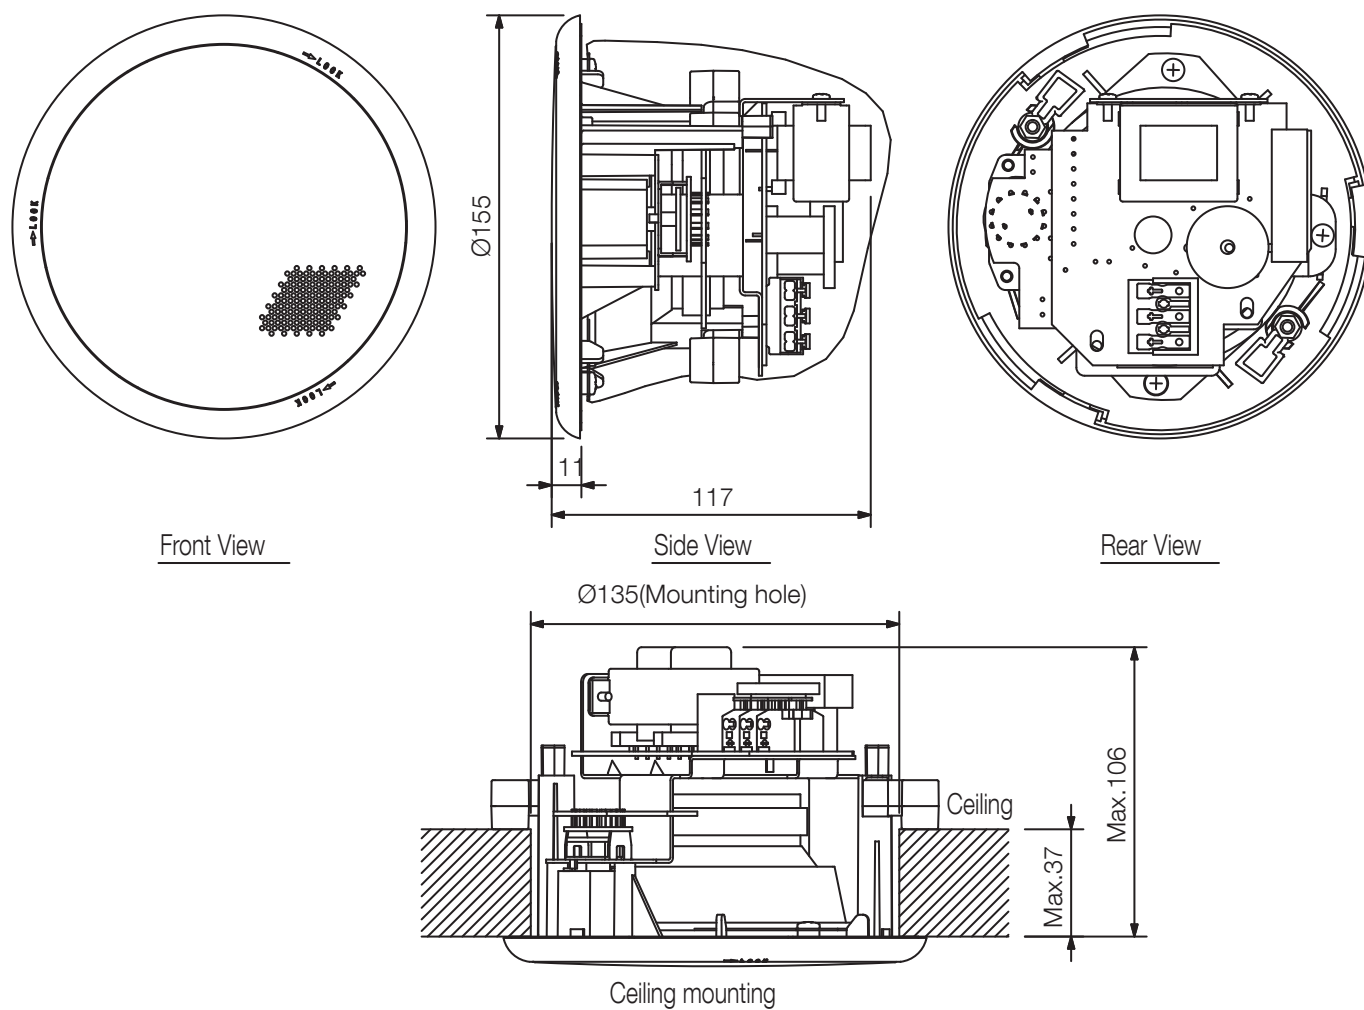

UNIT:mm

SCALE:1/3