

# F-2352SC

PANEL CONE SPEAKER

The F-2352SC ceiling and wall-mounted speaker covers an extremely wide area and can be used for 25, 70 and 100 V line applications. Well-balanced sound can be heard uniformly at any location.



Order no: F-2352SC EU


## Specifications

Frequency response	80 Hz - 20 kHz
Sensitivity (1#W, 1#m) (combined)	89 dB
Speaker component	Low: 12 cm cone-type, High: Balanced dome-type
Rated input	6 W
Tappings	6 / 3 / 1 / 0.5 W (100 V), 6 / 3 / 1.5 / 0.5 / 0.25 W (70 V), 16 $\Omega$ , 8 $\Omega$
Mounting hole	200,00 mm
Power handling capacity	Continuous pink noise: 9 W (8 $\Omega$ ), Continuous program: 18 W (8 $\Omega$ )
Dimensions (W x H x D)	x 154
Dimensions ( $\phi$ x D)	230 x 154 mm
Finish	Steel plate, Fire-resistant ABS resin (resin material grade: UL-94 V-0), cream white (RAL 9001 or equivalent)


# F-2352SC

PANEL CONE SPEAKER


## Appearance

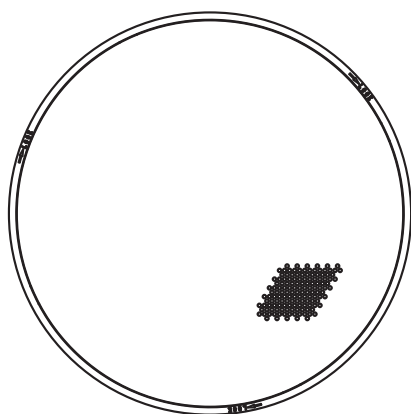


Front View

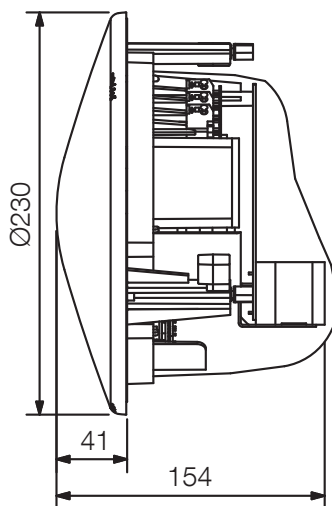

Side View

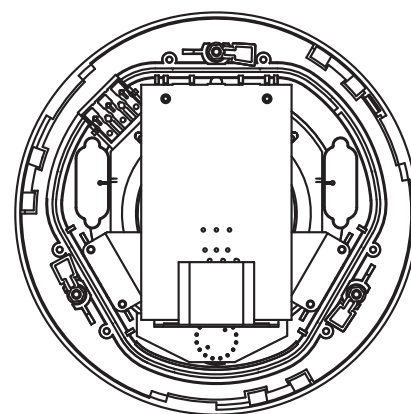

Rear View

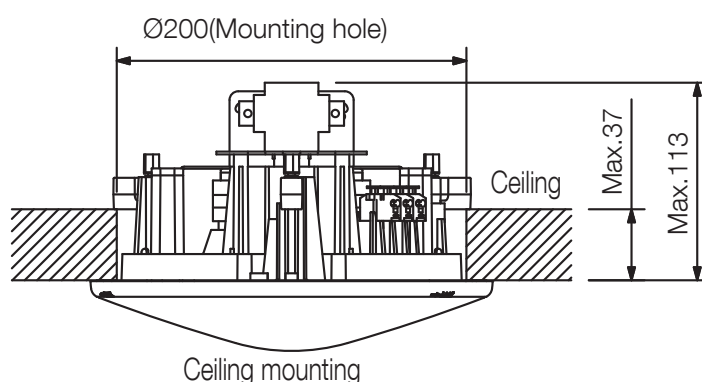

Ceiling mounting

UNIT:mm

SCALE:1/5