



G-Profile Turbo POI

RLB LED Projector



Description

The G-Profile Turbo POI is a RLB LED moving head with an IP66-rating and a bright color output. The high-brightness LED moving head is based on an optimized additive color mixing to match the highest demands of color rendering and total output. Its framing system allows the G-Profile Turbo POI to perform beam-shaping images and projections via four individually controllable blades with module rotation. The integrated dehumidifier ensures perfect inner cleanness of the luminaire and no accumulation of dust or externally induced impact on internal optics, gobos, or the light source unit.

Features and benefits





- ✓ 19973 lumen, high CRI RLB LED projection luminaire (Red, Lime, Blue)
- ✓ 2000K - 10000K CTC control, no hotspots, and 8° to 43° zoom range
- ✓ Extended color palette with warmer colors and richer hues
- ✓ 4-blade rotatory framing module, 1 rotatory gobo wheel, FX wheel, 4-facet prism, and ultra-high-speed strobe
- ✓ IP66-rated and 5-year warranty
- ✓ Patented built-in dehumidifier
- ✓ Corrosion class C5-M (marine) makes it ideal for coastal and offshore installations
- ✓ Ideal application: permanent medium and large scale architectural installations in non-accessible outdoor locations

Certifications & classifications

IP66

RoHS




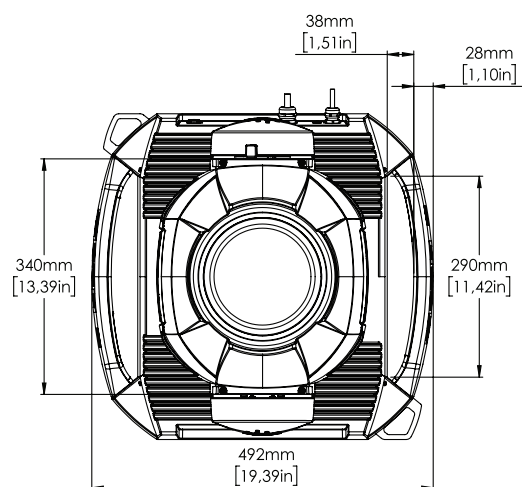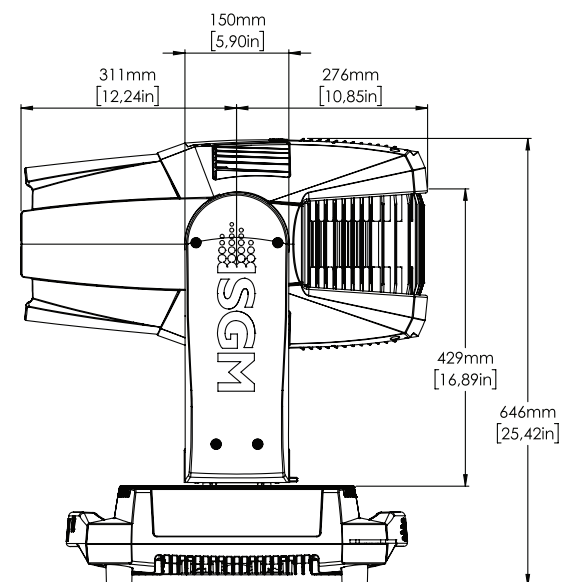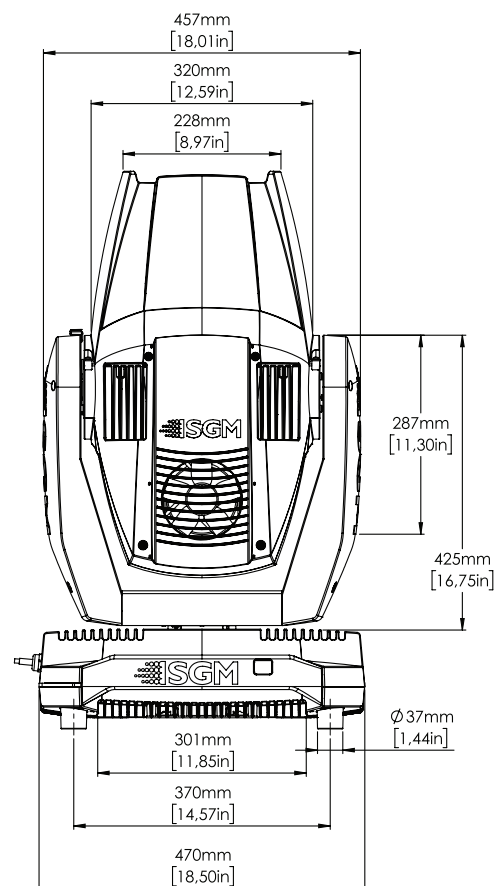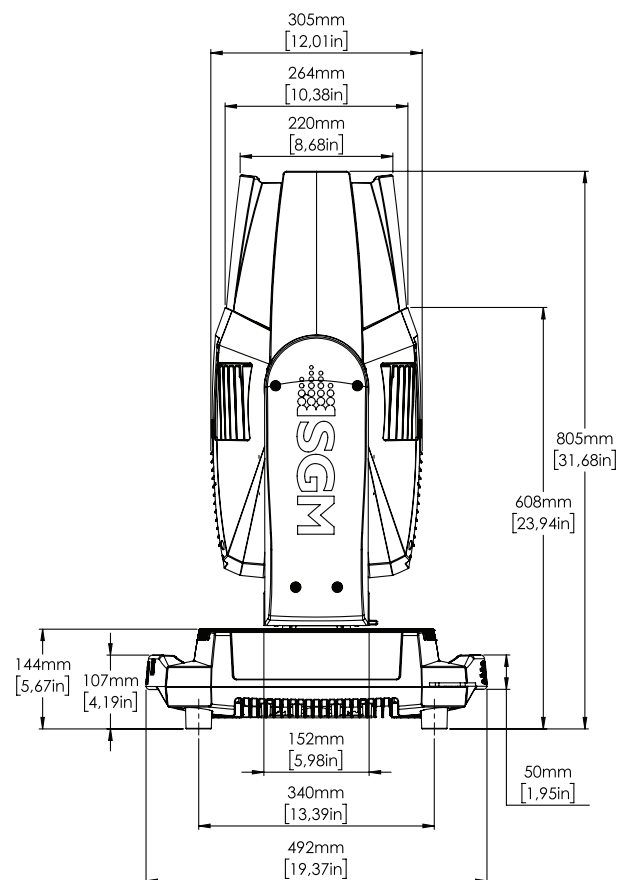


Manufacturer	SGM
Luminaire	G-Profile Turbo max All on raw peak
Measurement Date	30-01-2018
Power Consumption	982 W
Light Output	20 048 lm
Field Angle	42.6 deg
Beam Angle	41.0 deg




Lux Diagram

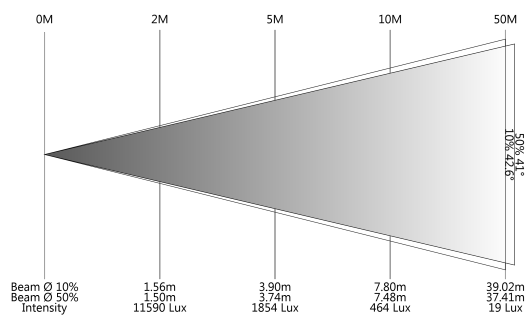


Polar Distribution

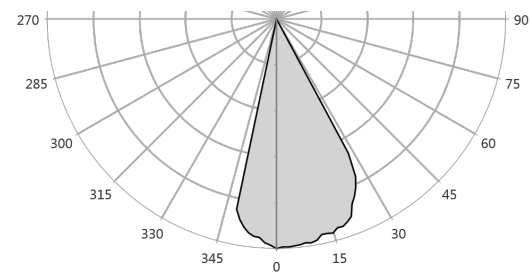

Beam Profile

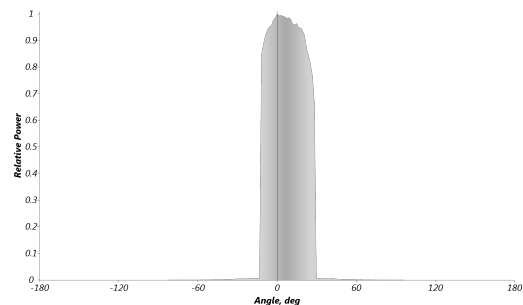

Spectral Distribution

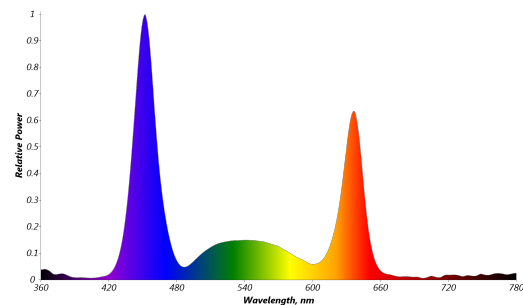

Gobo wheel



Specification

Optical Data

Focus	Motorized
Frost	0% - 100%, variable
LED expected lifetime	50,000 hours
Lens diameter	125 mm
Lightsource	High-power RLB LED
Prism	4-facet rotating prism
Pseudo zoom range	1° to 43°
Zoom	Motorized
Zoom range	8° to 43°

Photometric

Average CRI (CTC)	83
Color temperature range	2000K - 10000K
Efficacy	20 lm/W
Light output all LEDs on	19973 lm
Light output blue	1896 lm
Light output green	5899 lm
Light output red	4523 lm
Lumen per kilogram	384 lm / Kg
Lux @ 10m	7042 lux
Lux @ 3m	78241 lux
Lux @ 5m	28166 lux
Maximum beam angle	42 °
Maximum field angle	44 °
Minimum beam Angle	9 °
Minimum field angle	11 °

Physical

Color options	Black - RAL 9004 Custom color - Any RAL White - RAL 9010
Corrosion class	CX (C5-M - ISO 12944)
IP class	IP66
Lens material	AR-coated glass
Material	Aluminium Plastic PA6.6 Stainless Steel
Net dimensions	470 x 805 x 492 mm
Net dimensions inches	18.5 x 31.7 x 19.4 inches
Net max height	821 mm
Net weight	52 kg (114.7 lbs)

Features	Color calibration	SGM proprietary, full color calibration
	Dehumidifier	Base / Head
	Dimming	Smooth fade in, gamma corrected curve
	Effect wheels	2 independent effect wheels with semi-continuous effect
	Framing	Rotatable framing module +/-45° 4 controllable shutter blades, individually adjustable +/-30°
	Gobo wheel (1)	5 rotatable, indexable, and interchangeable gobos + open
	Iris	1% - 100%, pulse effect
	Other	LED frequency control over DMX
	Pan	540°
	Power / DMX indicator	Base
	Strobe	Ultra-high-speed strobe effects
	Tilt	270°
Electrical	Electrical protection	Overload protection
	Input voltage, absolute max. rating	190 - 264 VAC; 50 / 60 Hz
	Input voltage, nominal	208 - 240 VAC; 50 / 60 Hz
	Max inrush current 230VAC	30 A
	Max power consumption	1150 W
	Power factor	0.98 PF (230 V)
	Power Supply Unit	Auto-ranging electronic switch-mode
	Standby power consumption	65 W
Programming and Control	16-bit control	Dimmer, colors, pan/tilt, gobo index/rotation, zoom, focus
	DMX channels	31, 32, 46, 47
	DMX modes	4
	Protocol	USITT DMX512A RDM ANSI E1.20
	Setting and addressing	RDM ANSI E1.20
Connections	Data cable diameter	6,5 mm +/- 0,2 mm
	DMX data in/out	5 meter cable for DMX In and DMX Thru (permanently wired)
	Power	Power cable 5 meter with bare ends (permanently wired)
	Power cable diameter	8,5 mm +/- 0,3 mm
Installation	Mounting point	4 x 2 M-10 locking points (suitable for two or four POI Omega Brackets)
	Orientation	Any

	Rigging possibilities	Hanging / horizontal mounted
	Safety features	2 attachment points for safety wire Minimum distance to combustible materials: 0.3 meter (11 in).
Thermal	Cooling	Active, Forced Air, Temperature-regulated
	Humidity (max.)	98 %
	Temperature range, operating	-40°C to 50°C
	Temperature range, start-up	-20°C to 50°C
	Temperature range, storage	-40°C to 80°C
	Thermal protection	Automatic overtemperature protection
	Total heat dissipation, max power	3923.8 BTU per hour
	Total heat dissipation, standby	221.8 BTU per hour
Included items	Included items	Safety instructions and installation quick guide 8 M-10 screws
Gobos	Glass	Borosilicate high-temperature glass
	Image diameter	30 mm
	Maximum thickness glass	3.5 mm colored glass or textured gobos
	Maximum thickness metal	1.1 mm black & white
	Metal	Not Recommended
	Outside diameter	37.5 mm
Conforms To	CE - 2014/30/EU: EMC Directive	EN 55103-1 EN 55103-2 EN 61000-3-2 EN 61000-3-3
	CE - 2014/35/EU: Low Voltage Directive	EN 60598-1 EN 60598-2-17 EN 62471 EN 60529
	RoHS2 Directive	2011/65/EU

NOTES:

Due to continuous improvements and innovations, specifications may change without notice.

LEDs' expected lifetime provided by manufacturer and obtained under manufacturer's test conditions.

Zoom range defined as a minimum beam angle to a maximum field angle.

Photometric measurements obtained with Goniometer Scan / SGM Illumination Lab 1.6.0.0.

Lumen output in pixel products is calculated.

Ordering information

Qty	Product name	Item number
<input type="checkbox"/>	G-Profile Turbo, POI, BL	80021261
<input type="checkbox"/>	G-Profile Turbo, POI, WH	80021262
<input type="checkbox"/>	G-Profile Turbo, POI, CU	80021263
<input type="checkbox"/>		
Accessories		Item number
<input type="checkbox"/>	Vacuum Test Kit	83061136
<input type="checkbox"/>	RDM Addressing Tool	
<input type="checkbox"/>	Omega Bracket POI	83060623
<input type="checkbox"/>	SGM USB uploader cable, POI	83062067
<input type="checkbox"/>		



Headquarter [+45 70 20 74 00](tel:+4570207400)

Mail info@sgmlight.com

Website sgmlight.com