

The PC-3CL is a completely-sealed, flush-mounted ceiling speaker made up of a high power handling, splash-proof, small full-range speaker employing a plastic film diaphragm. Its chemical-resistant grille makes the speaker ideal for use in clean rooms, hospital operation rooms, and hot and humid locations such as bath rooms and wet sauna rooms.




Order no: PC-3CL

Specifications

Frequency response	150 Hz - 20 kHz
Sensitivity (1#V, 1#m) (combined)	87 dB
Rated input	3 W
Tappings	3 / 1 W (100 V), 1.5 / 0.5 W (70 V)
Mounting hole	100,00 mm
Weight	0,6 kg
Certificates	IP64, Ease
Dimensions (W x H x D)	x 104,5
Dimensions (ø x D)	139 x 104,5 mm
Gross weight	0,7 kg
Finish	Alloy-coated ABS resin, traffic white (RAL 9016 or equivalent)
Operating temperature	-20 °C to +60 °C

Appearance

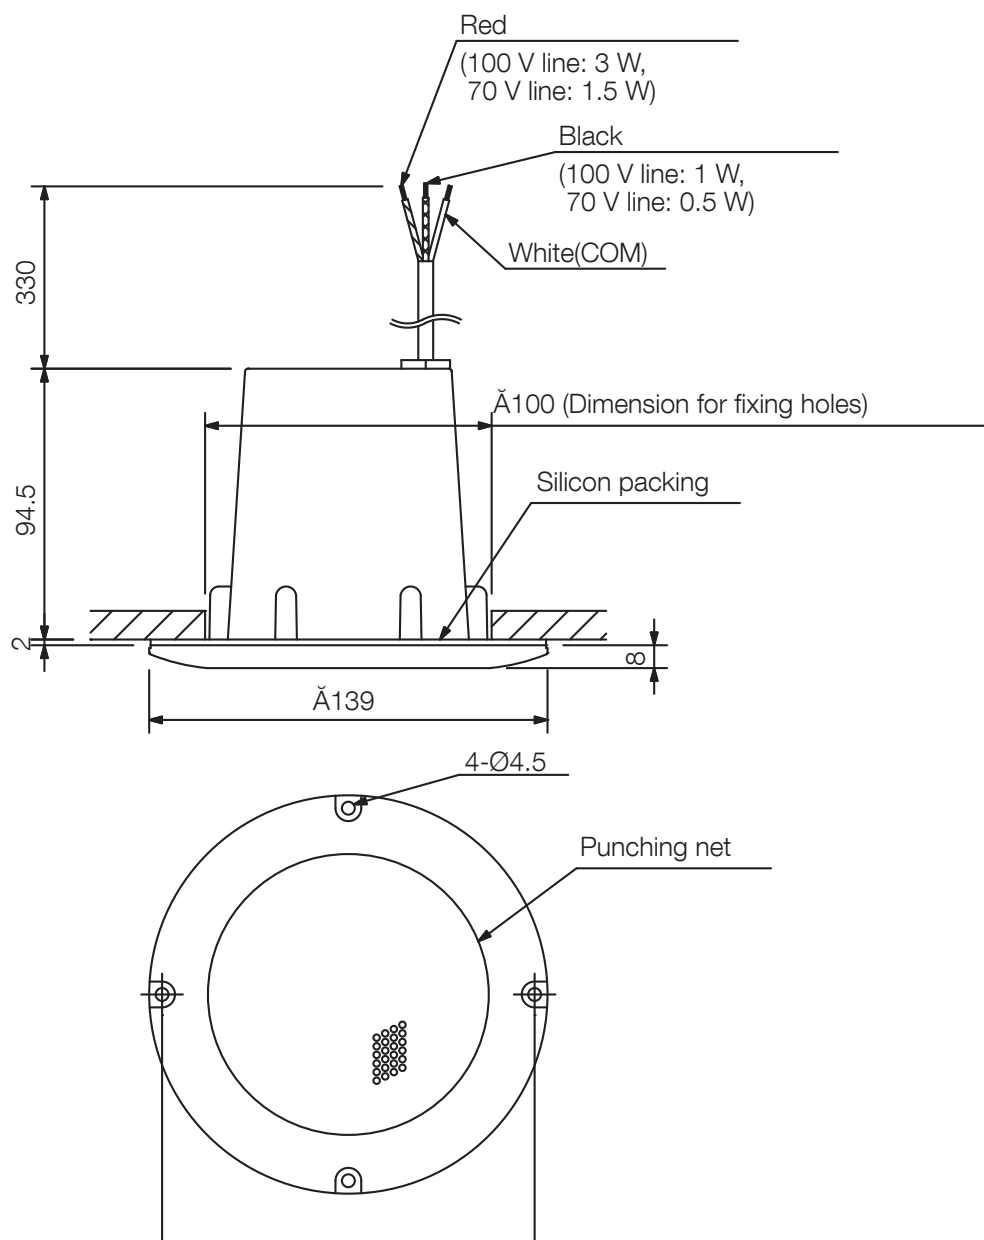

UNIT:mm

SCALE:1/3