

Full-range 8 cm, 2 k#/5 W speaker with sealed rear chamber, and high-molecular substance speaker vibration section to prevent floating dust particles from contaminating medical, chemical, or IC/photo film production.




Order no: PC-5CL

## Specifications

|                                      |  |
|--------------------------------------|--|
| Frequency response                   | 150 Hz - 20 kHz  |
| Sensitivity (1#V, 1#m)<br>(combined) | 87 dB  |
| Speaker component                    | 8 cm cone-type   |
| Rated input                          | 5 W, 2,5 W   |
| Mounting hole                        | 98,00 mm   |
| Weight                               | 0,6 kg   |
| Certificates                         | Ease   |
| Dimensions (W x H x D)               | x 110  |
| Dimensions (ø x D)                   | 116 x 110 mm   |
| Gross weight                         | 0,8 kg   |
| Finish                               | Alloy-coated ABS resin, traffic white (RAL 9016 or equivalent) |
| Operating temperature                | -20 °C to +55 °C   |

Appearance

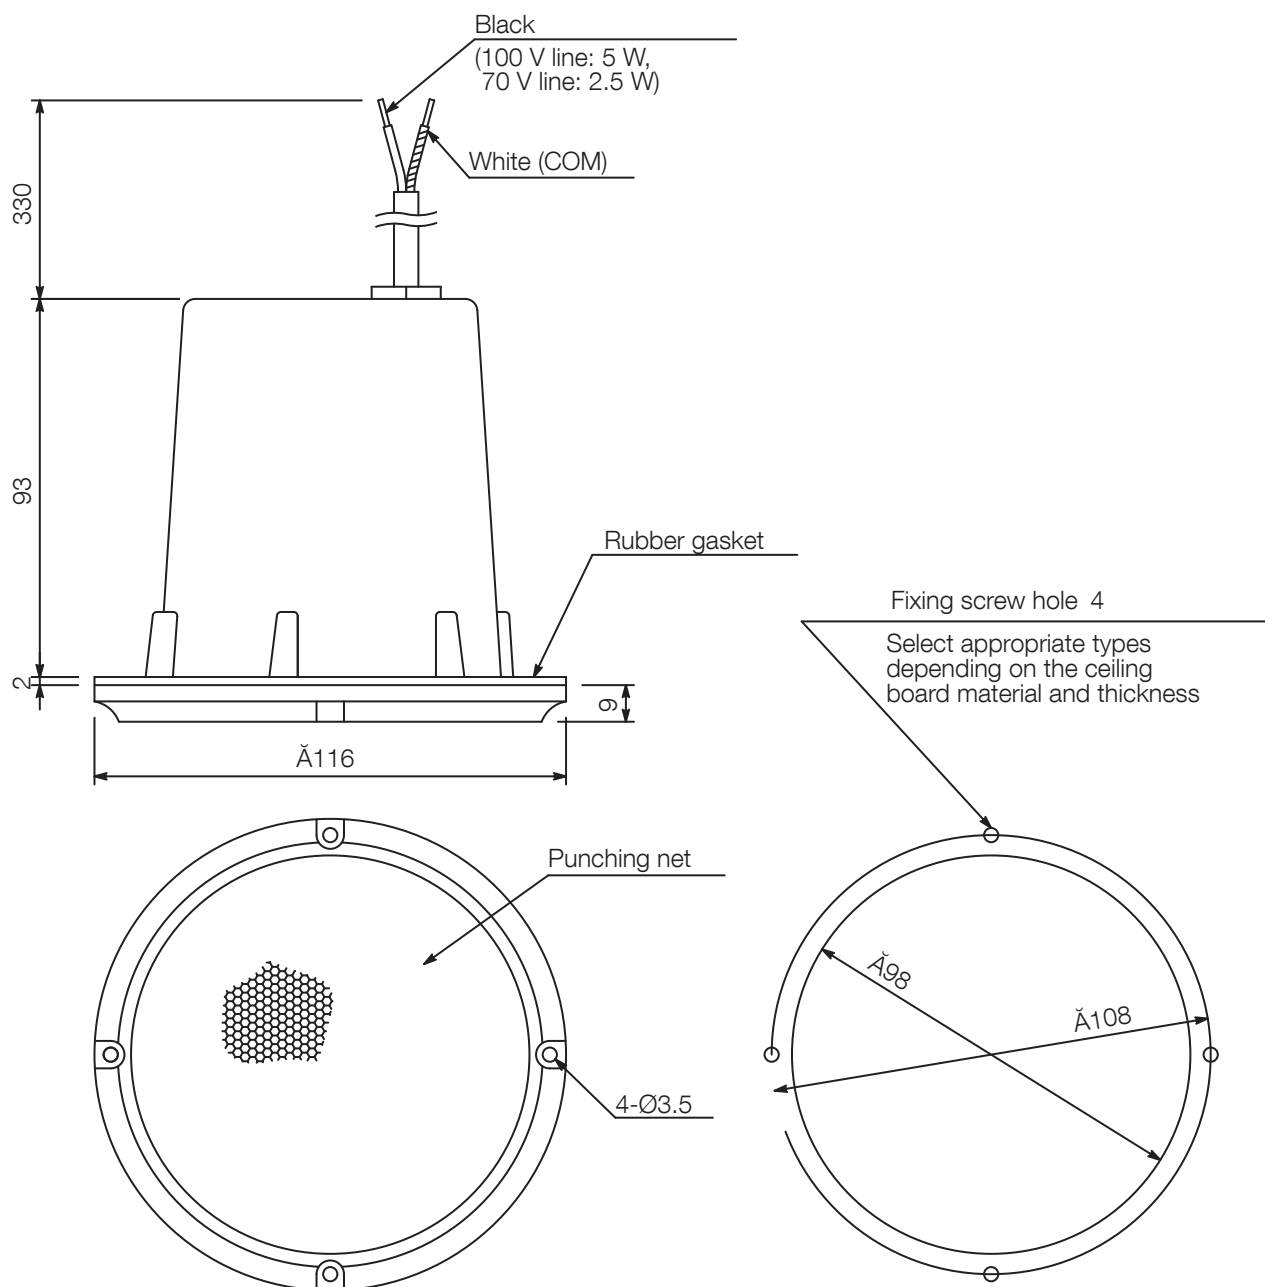

UNIT:mm

SCALE:1/2

Dimension diagram for fixing holes