

The SC-630 is a compact, highly intelligible speaker suited to public address announcement applications. Its external speaker component finished with powder coating, and stainless steel bracket and screws ensure the unit's weatherproof capability.




Order no: SC-630 EU


## Specifications

Frequency response	250 Hz - 10 kHz
Connection	Cable with 2 wires
Sensitivity (1#V, 1#m) (combined)	113 dB
Rated input	30 W
Rated impedance	8 $\Omega$
Weight	1,7 kg
Certificates	IP65
Dimensions (W x H x D)	285 x 227 x 277 mm
Dimensions ( $\phi$ x D)	x 277 mm
Gross weight	2,16 kg
Finish	Aluminium, powder coating, off-white (RAL 9010 or equivalent)
Operating temperature	-20 °C to +55 °C (must be free from dew condensation)


## Appearance

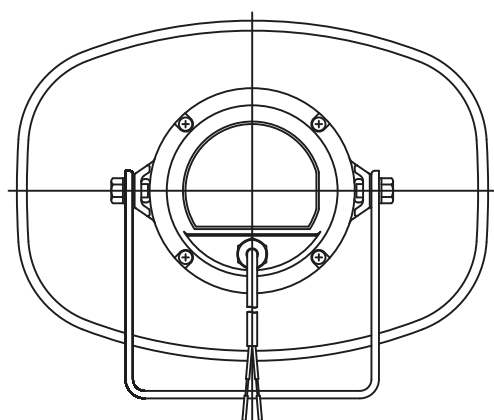


Rear View




Wiring diagram

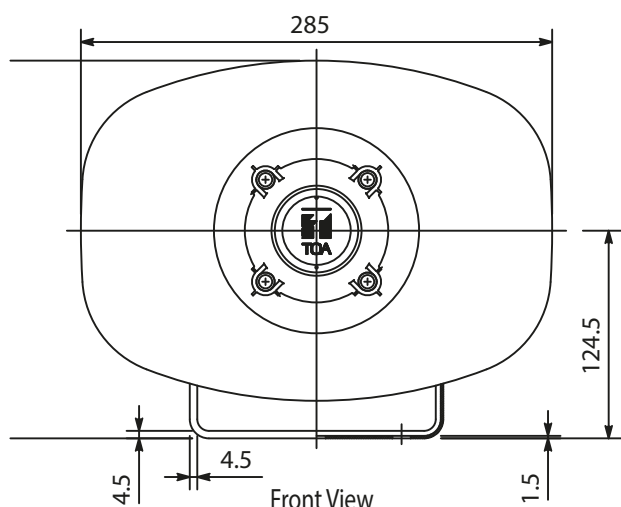

Front View

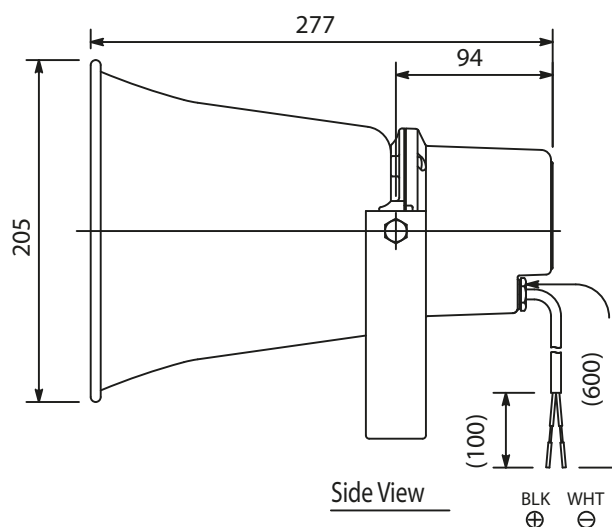

Side View

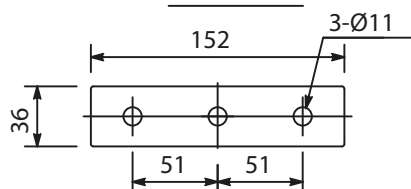

Bracket dimensional diagram

UNIT:mm

SCALE:1/5

Note: Numerical values in parentheses are for reference only.