



## WM-5225 D04

WIRELESS MICROPHONE

The WM-5225 Wireless Microphone employs an electret condenser microphone capsule and is suitable for any applications. Thanks to the PLL-synthesizer system, 64 different operating frequencies are made available. A high output power ensures stable radio signal transmission.

---



Article number (SAP)WM-5225 D04  
Alternative products: WM-5265 B01,  
WM-5265 C01, WM-5265 C07, WM-5265  
D01, WM-5265 D04, WM-5265 G01,  
WM-5265 H01, WM-5270 B01, WM-5270  
C07, WM-5270 D01, WM-5270 D04,  
WM-5270 G01, WM-5270 H01, S4.04-HDX-  
EB, S4.10-HDX-EB, S5.3-HCX-C7, S5.3-HDX-  
C7

---




## WM-5225 D04

WIRELESS MICROPHONE

### Specifications

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| Power source (combined) | Battery (1 AA size alkaline battery, 1.5 V or WB-2000-2) |
| Battery life            | 10 h                                                     |
| Type                    | Electret condenser                                       |
| Directivity             | Cardioid                                                 |
| Frequency range         | 863 – 865 MHz                                            |
| Selectable frequencies  | 64                                                       |
| Simultaneous channels   | 7                                                        |
| AF response             | 100 Hz - 15 kHz                                          |
| RF output power         | 10 mW                                                    |
| Maximum SPL             | 126 dB                                                   |
| Weight                  | 180,0 g (with battery)                                   |
| Dimensions (W x H x D)  | x 231,5                                                  |
| Dimensions (ø x D)      | 43,6 x 231,5 mm                                          |
| Gross weight            | 0,35 kg                                                  |
| Finish                  | Resin, black                                             |
| Operating humidity      | 30% - 85%                                                |
| Operating temperature   | -10°C ... +50°C                                          |

## Appearance

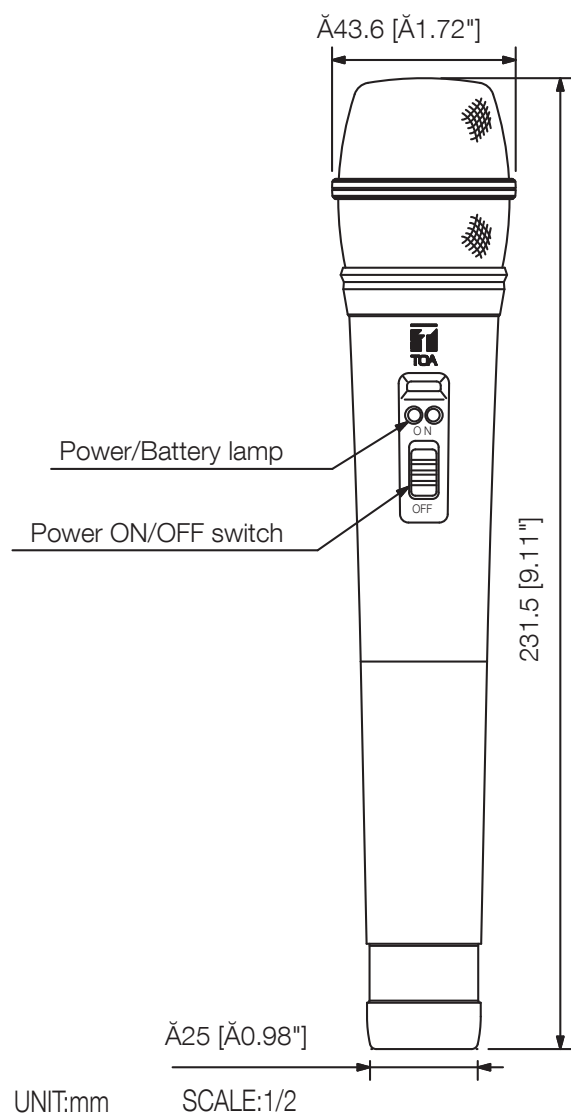

\*

| Type      | Frequency Range      |
|-----------|----------------------|
| A01       | 692 - 722 MHz, UHF   |
| B01, B02  | 722 - 752 MHz, UHF   |
| C01 - C07 | 794 - 830 MHz, UHF   |
| D01 - D05 | 830 - 865 MHz, UHF   |
| E01       | 668 - 698 MHz, UHF   |
| F01       | 636 - 666 MHz, UHF   |
| G01, G02  | 606 - 636 MHz, UHF   |
| H01       | 576 - 606 MHz, UHF   |
| K01       | 925 - 937.5 MHz, UHF |

