

The BS-678, of which cabinet is made of wood, can be installed in a vertical or horizontal orientation. Either concealed in-wall wiring or exposed wiring can be used for speaker cable connection. The speaker structure that permits direct wall-mounting with screws prevents the speaker from falling easily even if an outward force is applied to. The input impedance can be easily changed by changing the tap position of the transformer. Two built-in 6-inch double cone speaker units deliver high quality sound. The push-in type input connector makes cable connections easy and allows bridge wiring.





Order no: BS-678

Specifications

Frequency response	150 Hz - 20 kHz
Connection	Push-in connector (briding terminal)
Sensitivity (1#V, 1#m) (combined)	94 dB
Speaker component	16 cm double cone-type
Rated input	6 W, 3 W
Tappings	6 / 3 / 1.5 / 0.8 W (100 V), 3 / 1.5 / 0.8 / 0.4 W (100 V)
Rated impedance	70 V, 100 V
Dimensions (W x H x D)	250 x 190 x 110 mm
Dimensions (ø x D)	x 110 mm
Finish	MDF, off-white (RAL 9010 or equivalent)
Operating temperature	-10°C to +50°C

Appearance

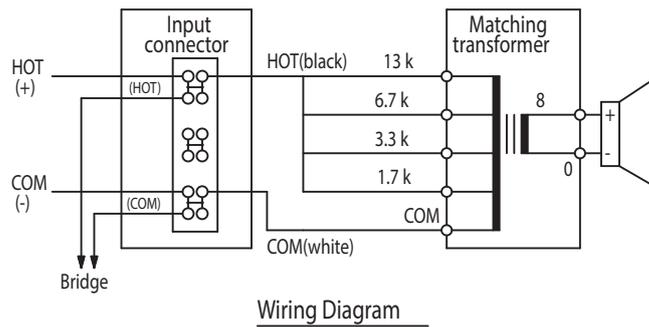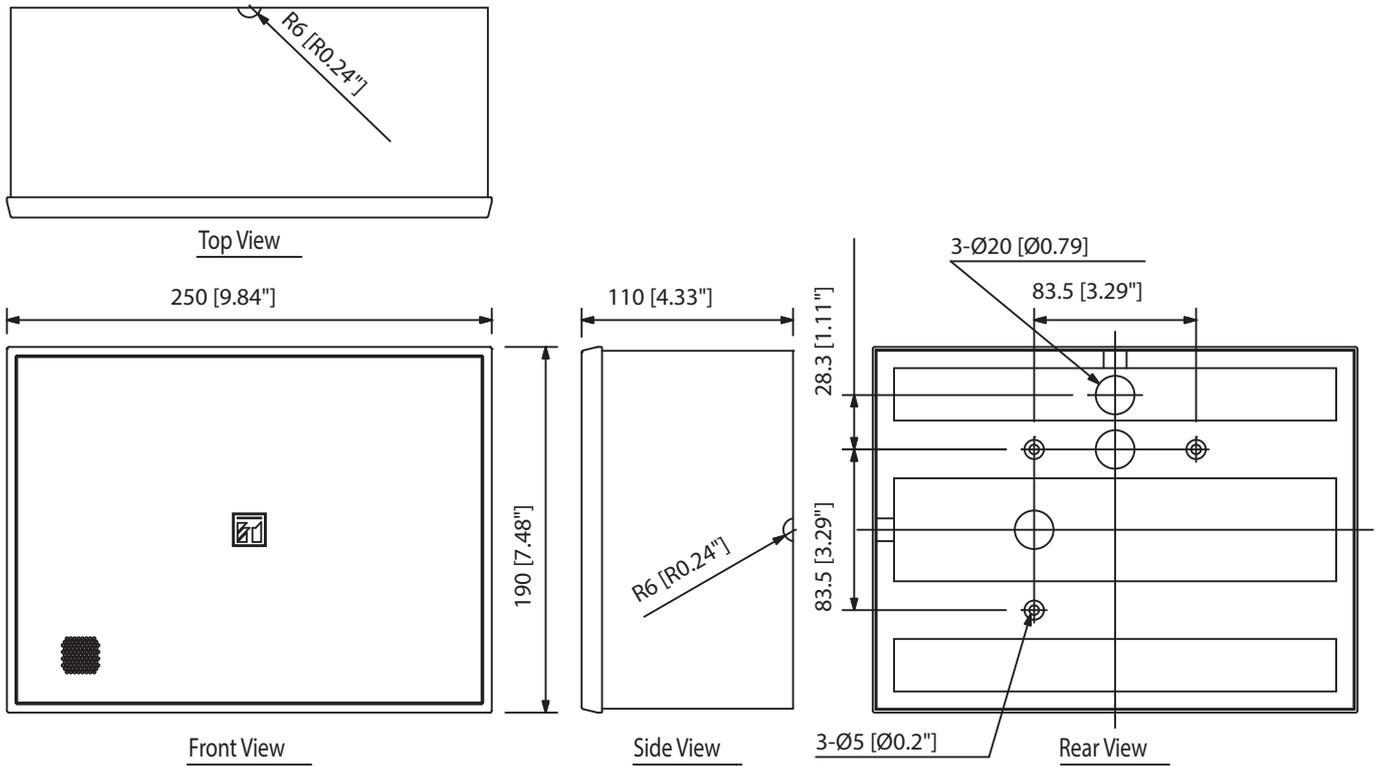

UNIT:mm SCALE:1/4