



Loudspeakers

Sub 10

Low-profile sub-bass loudspeaker



Optimal Audio



FEATURES

- Discreet size
- Punchy sub-bass extension
- Ideal where space is limited
- Great sub support for smaller systems

Sub 10 is a slimline, passive 10" subwoofer designed for applications that call for increased impact and low frequency performance from the smaller Optimal Audio loudspeaker range. This visually unobtrusive enclosure makes it perfectly suited where space is limited such as under banquette seating.

It features a 10" (250mm) driver with a generously sized low frequency

port for reduced air noise. With a peak SPL of 127dB this is a truly punchy little sub and can be used on the ground, fixed to a wall or ceiling or flown using integral M8 inserts.

An impact-resistant perforated steel grille protects the driver, and rubber feet on the base resist movement. The Sub 10 enclosure is constructed from plywood and finished in black textured paint.

APPLICATIONS



Cafes



Bars/
Restaurants



Retail



Wedding
Venues



Hotels



Education
Facilities



Houses of
Worship



Museums



Fitness Studios



Residential




Loudspeakers

Sub 10

Low-profile sub-bass loudspeaker



Optimal Audio

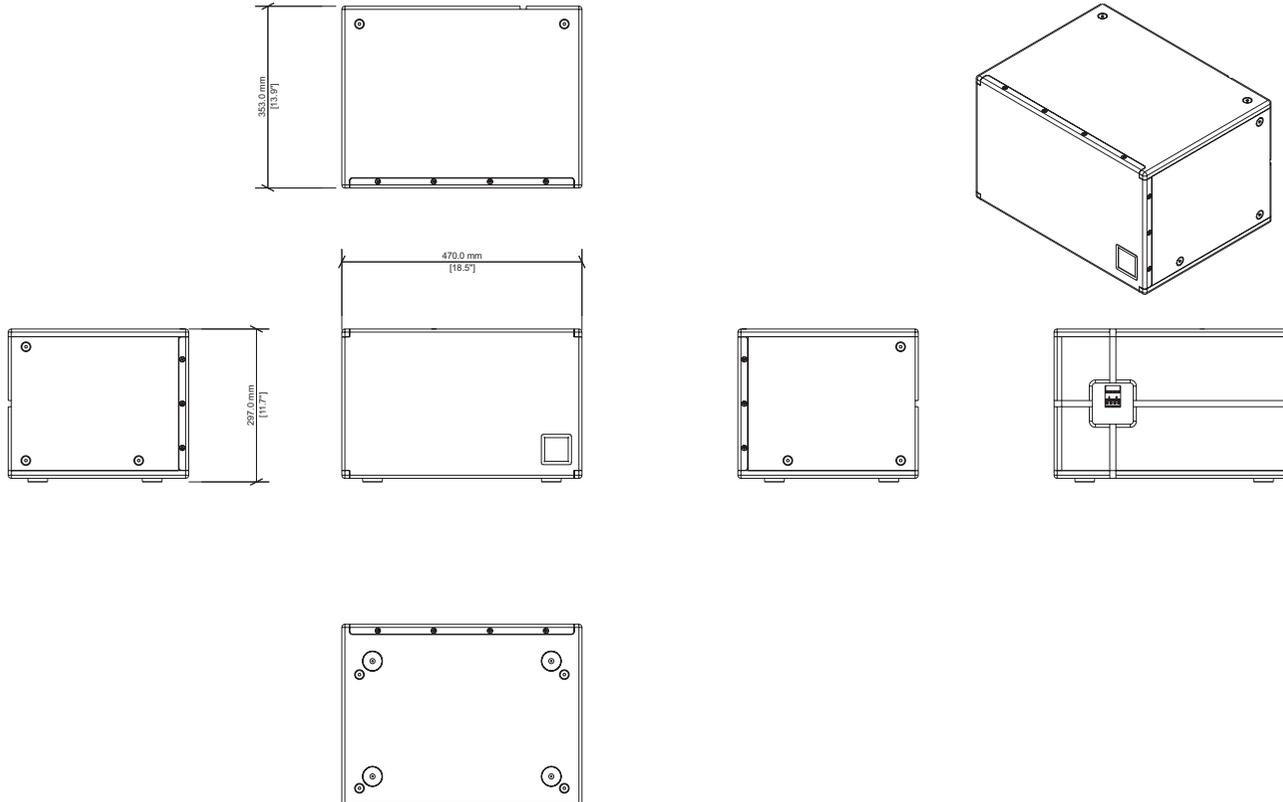

SPECIFICATIONS

TYPE	: Sub-bass loudspeaker
FREQUENCY RESPONSE (with preset)	: 50Hz - 150Hz ± 3dB -10dB @ 42Hz
DRIVERS	: LF: 10" (250mm)
RATED POWER	: 250W (AES) 1000W (peak)
NOMINAL IMPEDANCE	: 8Ω
SENSITIVITY (1W/1m)	: 97dB (Half Space)
MAXIMUM SPL	: 121dB (cont) 127dB (peak) (Half Space)
RECOMMENDED AMP	: SmartAmp 30
ENCLOSURE	: Plywood
FINISH	: Black textured paint
PROTECTIVE GRILLE	: Perforated steel
CONNECTORS	: Euroblock type
FITTINGS	: 12 x M8, inset bolts
DIMENSIONS	: (W) 470mm x (H) 297mm x (D) 353mm (W) 18.50" x (H) 11.7" x (D) 13.9"
WEIGHT	: 12.9Kg (28.4lbs)
ACCESSORIES (available separately)	: Sub Bracket (Pair) M8 Eye Bolt



Textured
Paint Finish



Weight

optimal-audio.co.uk

© 2021. Optimal Audio Group Ltd.